

Recessed Donut

Features

- Edison LED's
- b,a,g / Fulham Driver
- 3000K / 4000K / 6500K or TW 3000K to 6500K
- Ra>80




Options

- Through wiring
- Dimmable options
- Occupancy sensor
- **Micro Prismatic Diffuser**



Dimension in mm

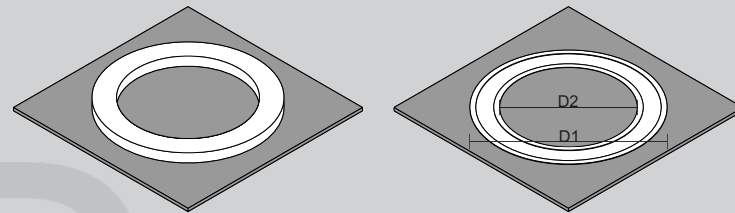

Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black texture | RAL9016 White texture | RAL9006 Grey texture

Direct - Pendant

ID	D1	D2	Wattage	Cutout	Luminous Flux
450	462	290	30W	455/297	3520lm
600	612	440	40W	605/447	4770lm
750	762	590	50W	755/597	6120lm
900	912	740	60W	905/747	7220lm
1050	1062	890	70W	1055/897	8300lm
1200	1212	1040	80W	1205/1047	9600lm



Technical Specifications

General

Driver : Constant Current
Input Voltage : 220-240Vac
Operating Temperature : 25°C ~ 55°C

Light Source

LED : Edison 2835
CRI (Ra) : >80
LED Colour Temperature : 3000K, 4000K, 6500K
LED Lifetime : >40000hrs
Efficacy : 120lm/W

Optical

Tilt : Fixed
Beam Angle : 100°
Diffuser : Opal P.S 70%

Physical

Body : High-Grade Extruded Aluminum
Mounting : Spring Clips / Suspension cable
Finish : White(RAL9016)
Black(RAL9005)
Grey (RAL9006)

Driver

Power Supply : Integral
Power Factor : >0.90
THD : <10%
Surge Protection : 2.5kV

***Customization on request**



microprismatic (UGR ≤ 19)



Recessed
Curvi Linear





