



## Drum

### Features

- Edison LED's
- b,a,g / Fulham Driver
- 3000K / 4000K / 6500K or TW 3000K to 6500K
- Ra>80




### Options

- Through wiring
- Dimmable options
- Occupancy sensor
- **Micro Prismatic Diffuser**



### Dimension in mm

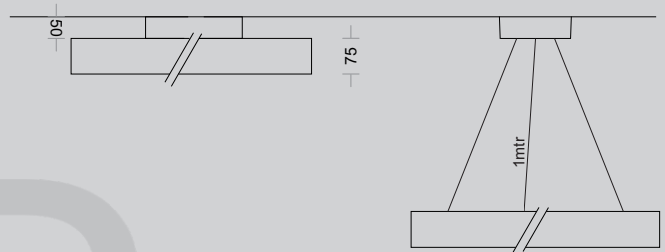

### Housing Colour



High-quality aluminium with powder coated finish in  
RAL9005 Black texture | RAL9016 White texture | RAL9006 Grey texture

## Technical Specifications

### General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: 25°C ~ 55°C

### Light Source

LED	: Edison 2835
CRI (Ra)	: >80
LED Colour Temperature	: 3000K, 4000K, 6500K
LED Lifetime	: >40000hrs
Efficacy	: 120lm/W

### Optical

Tilt	: Fixed
Beam Angle	: 100°
Diffuser	: Opal P.S 70%

### Physical

Body	: High-Grade Extruded Aluminum
Mounting	: Suspension cable (1mtr standard)
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL9006)

### Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2.5kV

### \*Customization on request


### Direct - Pendant

ID	Wattage	Luminous Flux
300mm	18W	2160lm
450mm	30W	3520lm
600mm	40W	4770lm
750mm	50W	6120lm
900mm	60W	7220lm
1200mm	80W	9600lm



microprismatic (UGR ≤ 19)

## Sizes

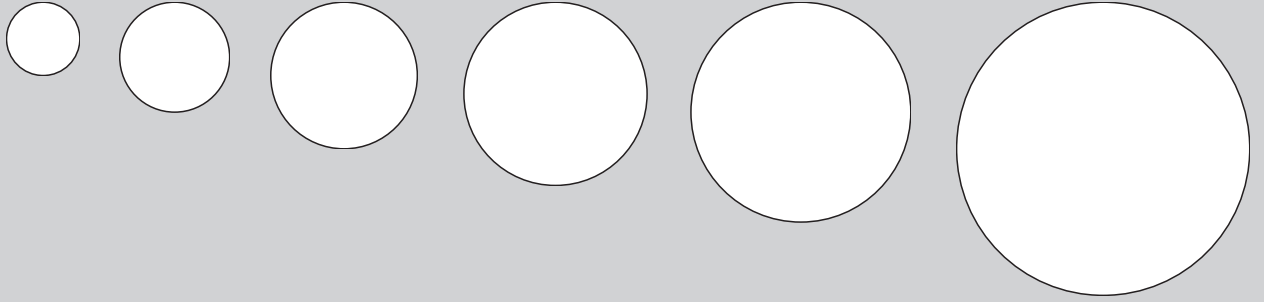

300

450





600

750

900

1200

## Shapes



Square

Triangle

Rectangle

Hexagon

\*Can be customized to any shape with varying length as per specification.

