




Led Recessed Drum

Features

- Edison LED's
- b,a,g / Fulham Driver
- 3000K / 4000K / 6500K or TW 3000K to 6500K
- Ra>80




Diffused

Options

- Through wiring
- Dimmable options
- Occupancy sensor
- Micro Prismatic Diffuser



Dimension in mm

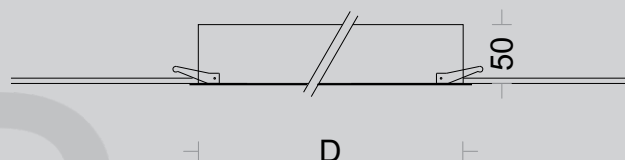

Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black texture | RAL9016 White texture | RAL9006 Grey texture

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: 25°C ~ 55°C

Light Source

LED	: Edison 2835
CRI (Ra)	: >80
LED Colour Temperature	: 3000K, 4000K, 6500K
LED Lifetime	: >40000hrs
Efficacy	: 120lm/W

Optical

Tilt	: Fixed
Beam Angle	: 100°
Diffuser	: Opal P.S 70%



Physical

Body	: High-Grade Extruded Aluminum
Mounting	: Spring Clips / Suspension cable
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL9006)

Driver



Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2.5kV

***Customization on request**





Direct

ID	Wattage	Luminous Flux
300mm	18W	2160lm

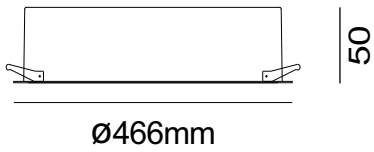



Direct

ID	Wattage	Luminous Flux
450mm	30W	3520lm

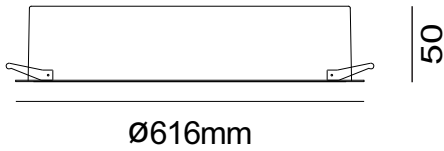



Direct

ID	Wattage	Luminous Flux
600mm	40W	4770lm

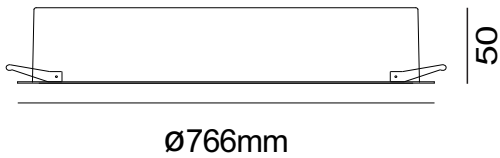



Direct

ID	Wattage	Luminous Flux
750mm	50W	6120lm

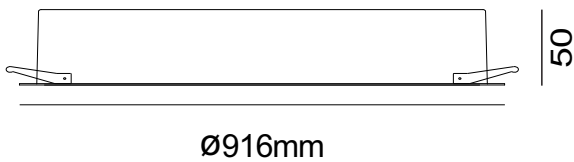

Direct

ID	Wattage	Luminous Flux
900mm	60W	7220lm

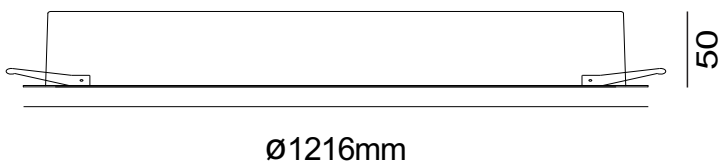

Direct

ID	Wattage	Luminous Flux
1200mm	80W	9600lm